

QUOTATION

Horizontal Bandsaw MITRE CUTTING SWIVEL BOW



Model TITAN + G




STANDARD SPECIFICATION

- Cut at 0° to 60° to the Right
- Bow head mitre rotation - angle stops at 0°, 45°, and 60°, angle degree graduated scale, with locking lever.
- [+ G] Gravity down feed, the option to 'Manually' control the bow 'down feed' & upward return', bow head handgrip with integrated on / off button. down feed valve control front mounted
- Material vice manual positioning with a fast clamping handle
- 2 blade speeds, 35 & 70 metres/min,
- Manual blade tensioning - Blade cleaning brush
- Single roller material in feed support - Simple length stop 0mm to 600mm
- Blade guides - combined action of side bearings, carbide plates, top bearing
- Flood coolant





OPTIONAL EQUIPMENT - For full details request the **FMB** brochure









- | | |
|--|--|
| KIT PN – Pneumatic vice clamping / closing | V – Blade speed variator |
| LX – Laser light cutting line | VAT – Cutting angle display |
| NB1 / NB2 – Nebulizer fine mist spray unit | In /Out roller conveyors – measure systems |




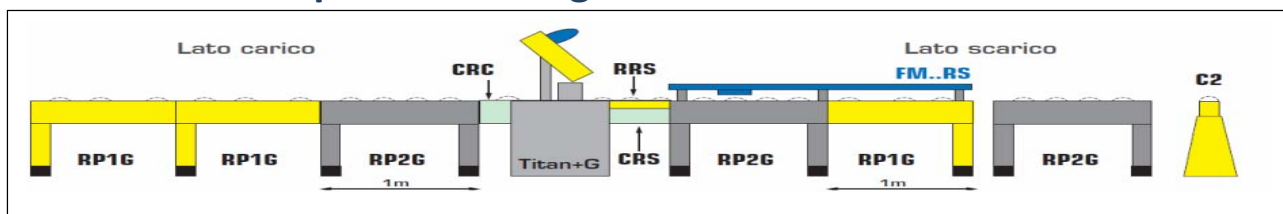




Schematic of a possible configuration:-






Capacities & Technical Data – ‘Standard’ Machine’

Cut Capabilities @ 0°			
 260	 260	 260 x 370	 260 x 370

Mitre Cut Capabilities @ 45° ▶ R				Mitre Cut Capabilities @ 60° ▶ R			
 260	 260	 120 x 290	 260 x 260	 1800	 180	 90 x 190	 180 x 180

Technical Characteristics							
 Blade Size 3300 x 27 x 0.9	 Metres / min 35 & 70	 HP 1.5	 Kw 1.1	 HP 0.08	 KW 0.06	 HP 0.10	 Kw 0.08

Technical Characteristics		
Machine Weight  Kg 460	Machine Sizes  a x b x c 0.9 x 1.8 x 1.6	Cutting Height  mm 960

All technical specifications that are described in catalogues, brochures and price lists are provided as general information and are not binding. Therefore, **FMB** reserves the right to modify such specifications, without prejudice to the basic technical, structural and functioning characteristics of the machine, without prior notice to the buyer.

STANDARD MACHINE - PRICE ex works_[Ex UK VAT] £ 6,022.00

All purchased metalworking machinery is fully supported by our in house service team, call outs or telephone support, we have possibly the largest dealer service team in the UK

General Conditions of Supply

Terms & Conditions : Supply to the UK Mainland & Northern Ireland

Quoted Prices	Are excluding UK Vat
Payment Terms	cleared funds required prior to dispatch Leeds .
Availability ' indicated ' as being :	Ex Stock Leeds – <i>Subject to remaining unsold</i>
Delivery Leeds to ' your works gates '	If requested - Extra [varies with Postcode]
Provision of the ' Off Loading Facilities ' i.e. crane or forklift, ' Actual ' of loading	Customers responsibility, cost, risk
Site Positioning, connection to all services	Customers responsibility, cost, risk
Commissioning	Customers responsibility, cost, risk Extra – JPS Machinery Ltd engineers visit
' The machines function 's training	machines operator manual, plus telephone assistance
Warranty 2 years	Manufacturers 2 year parts & labour warranty
Validity of Offer	Subject to remaining unsold
Country of Origin	Italy

Warranty: Against faulty design, faulty material or workmanship.

Excluded from the warranty are: Consumable wear parts, normal wear and tear, and component failure due to non-observance of the manufacturer's maintenance instructions.

Claims exceeding the costs of repair /replacement of any defective parts are not accepted.

The warranty (*parts and services*) is provided subject to the same terms and conditions of delivery as the original supply of the machine.

Large choice of roller conveyors & measure systems

For full details request the **FMB** brochure

